


CODE: **AWO003 v1.3**
 NAME: **7/TRP20/PAR**

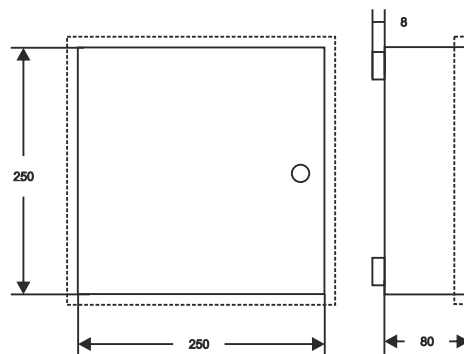

DESTINATION

PARADOX:

- 1) (728 ULT, E55, E65, MG5000) + PS817
- 2) SP5500, 6000

MODULES:

- 1) (2 x ZX8) + PS817
- 2) (ACM12, APR3- ADM2, PS17) + PS817
- 3) APR3- HUB2 + ZX8 + PS817

TECHNICAL DATA

Dimensions:	internal: W=250, H=250, D=80 external: W1=255, H1=255, D1=88mm [mm, +/-2]
Weight net/gross:	2,25kg / 2,40kg [+/-0,1kg]
Battery space:	7Ah/12V Sealed Lead Acid (SLA)
Transformer:	TRP 20VA/16V/18V in the case of PC/ABC in class UL94-V0, IP20
Power supply:	230V/AC (-15%/+10%), 50Hz, 120mA (max.)
Power supply output:	U1=16V/AC or U2=18V/AC (-5%, +15%), I1=1,2A or I2=1,0A (max.)
Operating environment:	class II , -10°C+ 40°C
Material description:	sheet steel DC01, thickness: 0,7mm, protection anticorrosion, color: RAL 9003
Destination:	indoor
Tamper protection:	1 x microswitch: opening, 0,5A@50V/DC max. NC- contacts
Closing:	screwed x 4
Notes:	optional: lockable, distance from wall (mounting surface) - 8mm, easy door removal, holes for MAGELLAN (antennas)
Certification, declaration:	CE, RoHS